

## AIF Series 600 Watts

### Data Sheet

**Total Power: 600 Watts**  
(12 V @ 50 A)  
**Input Voltage: 300 V**  
**# of Outputs: Single**



### SPECIAL FEATURES

- 600 W continuous power at 100 °C baseplate temperature
- 108 W/in<sup>3</sup> (6.6 W/cm<sup>3</sup>)
- High efficiency - up to 90%
- Low output ripple and noise
- Positive and Negative enable function
- Excellent transient response
- OVP, OCP, V Adj control with ALP™ analog mode linear control, or through I<sup>2</sup>C bus with digital mode control
- Paralleable with accurate current sharing
- EU Directive 2002/95/EC compliant for RoHS
- Two year warranty

### SAFETY

- UL 60950 Recognized
- cUL 60950 Recognized
- TUV EN60950 Licensed
- CE CE Mark

### Electrical Specifications

Input	
Input range	250 - 420 Vdc
Input surge	450 V / 100 ms
Efficiency	90% @ 5.0 V (Typical)
Output	
Load regulation	0.2% typical down to no load
Line regulation	0.2% typical
Noise ripple	100 mV typical (below 5 V); 2% typical (5 V and above)
Remote sense	Up to 0.5 V
Output voltage adjust range	+/-20% for 5V and above; +10%/-50% for below 5 V
Transient response	5% max for 3.3 V and above, 150 mV for 1.8V, deviation with 25% to 75% full load 250 μS (max) recovery
Current share accuracy	3% typical
Overshoot protection	115% Vo (nominal)
Current limit	115% Io maximum
Control	
Voltage adjust	80 to 120% Vo linear programming for 12 V, 15 V, 24 V, 48 V 50% to 110% for 1.8 V - 5.0 V
Enable	TTL compatible (positive & negative enable options)
Current limit adjust	20 to 100% Io linear programming or digital mode control
Clock input (external sync)	3.3 to 5.5 Vp-p @ 800 KHz ±10%
Clock output (internal clock)	4.5 Vp-p typical @ 800 KHz ±5%
Power good identification	High (Vo) = power good
Temperature monitor output	10 mV/°K (2.73 = 0°C)
Current monitor output	0 to 1 mA (1 mA = 100% Io rated)
Overshoot protection adjust	110 to 150% Vo linear programming by voltage or resistor, or digital mode control

Notes: Nominal values apply with sense pins connected and other control pin unconnected.  
ALP: Astec Linear Programming

### Environmental Specifications

Operating temperature	-20 °C to +100 °C (case temperature)
Start up temperature	-40 °C to +100 °C (case temperature)
Storage temperature	-40 °C to +125 °C
Overtemperature protection	110 °C max

### Ordering Information


Input Voltage	Output Voltage	Efficiency	Model Number
300 V	1.8 V @ 120 A	80% (Typ)	AIF120Y300 *-**L
300 V	3.3 V @ 120 A	87% (Typ)	AIF120F300 *-**L
300 V	5.0 V @ 80 A	90% (Typ)	AIF80A300 *-**L
300 V	12 V @ 50 A	90% (Typ)	AIF50B300 *-**L
300 V	15 V @ 40 A	90% (Typ)	AIF40C300 *-**L
300 V	24 V @ 25 A	90% (Typ)	AIF25H300 *-**L

1. For Negative enable, add suffix "-N".
2. For Non-thread hole, add suffix "-NT".
3. For RoHS 6, add suffix "-L".

### Pin Assignments

Input (AC)	Output (DC)	Control Pins
31. Positive	21. Positive	1. +Sense
32. Negative	22. Positive	2. Temp Mon
	23. Positive	3. C Mon
	24. Positive	4. C Share
	25. Negative	5. Clk Out
	26. Negative	6. Clk In
	27. Negative	7. PG/ID
	28. Negative	8. C Lim Adj
		9. OVP Adj
		10. V Adj
		11. Enable
		12. -Sense

Mechanical Drawings

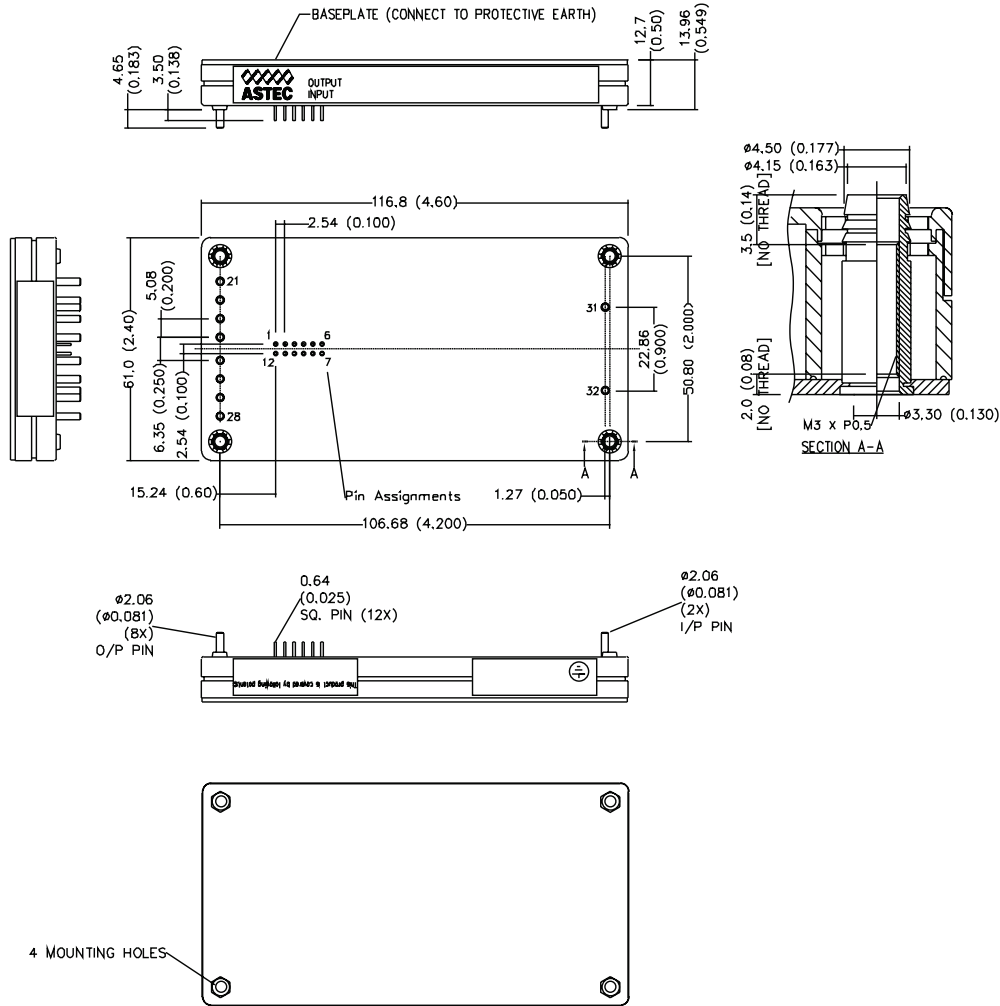

WORLDWIDE OFFICES

Americas

2900 South Diablo Way  
Suite B100  
Tempe, AZ 85282, USA  
+1 888 412 7832

Europe (UK)

Ground Floor Offices, Barbary House  
4 Harbour Buildings, Waterfront West  
Brierley Hill, West Midlands  
DY5 1LN, UK  
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza  
2 Wing Yip Street  
Kwun Tong, Kowloon  
Hong Kong  
+852 2176 3333



[www.artesyn.com](http://www.artesyn.com)

Artesyn Embedded Technologies, Artesyn Embedded Power, Artesyn, and all Artesyn related logos are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. Specifications are subject to change without notice. © 2019 Artesyn Embedded Technologies, Inc. All rights reserved. For full legal terms and conditions, please visit [www.artesyn.com/legal](http://www.artesyn.com/legal).

For more information: [www.artesyn.com](http://www.artesyn.com)  
For support: [productsupport.ep@artesyn.com](mailto:productsupport.ep@artesyn.com)

AIF Series-DS 19Nov2019